



# Rexello<sup>®</sup>

The Name That Carries Weight


ISO 9001-2000  
Quality System  
Quality Endorsed Company  
Certification No: DEC13252



# RG


**SERIES**



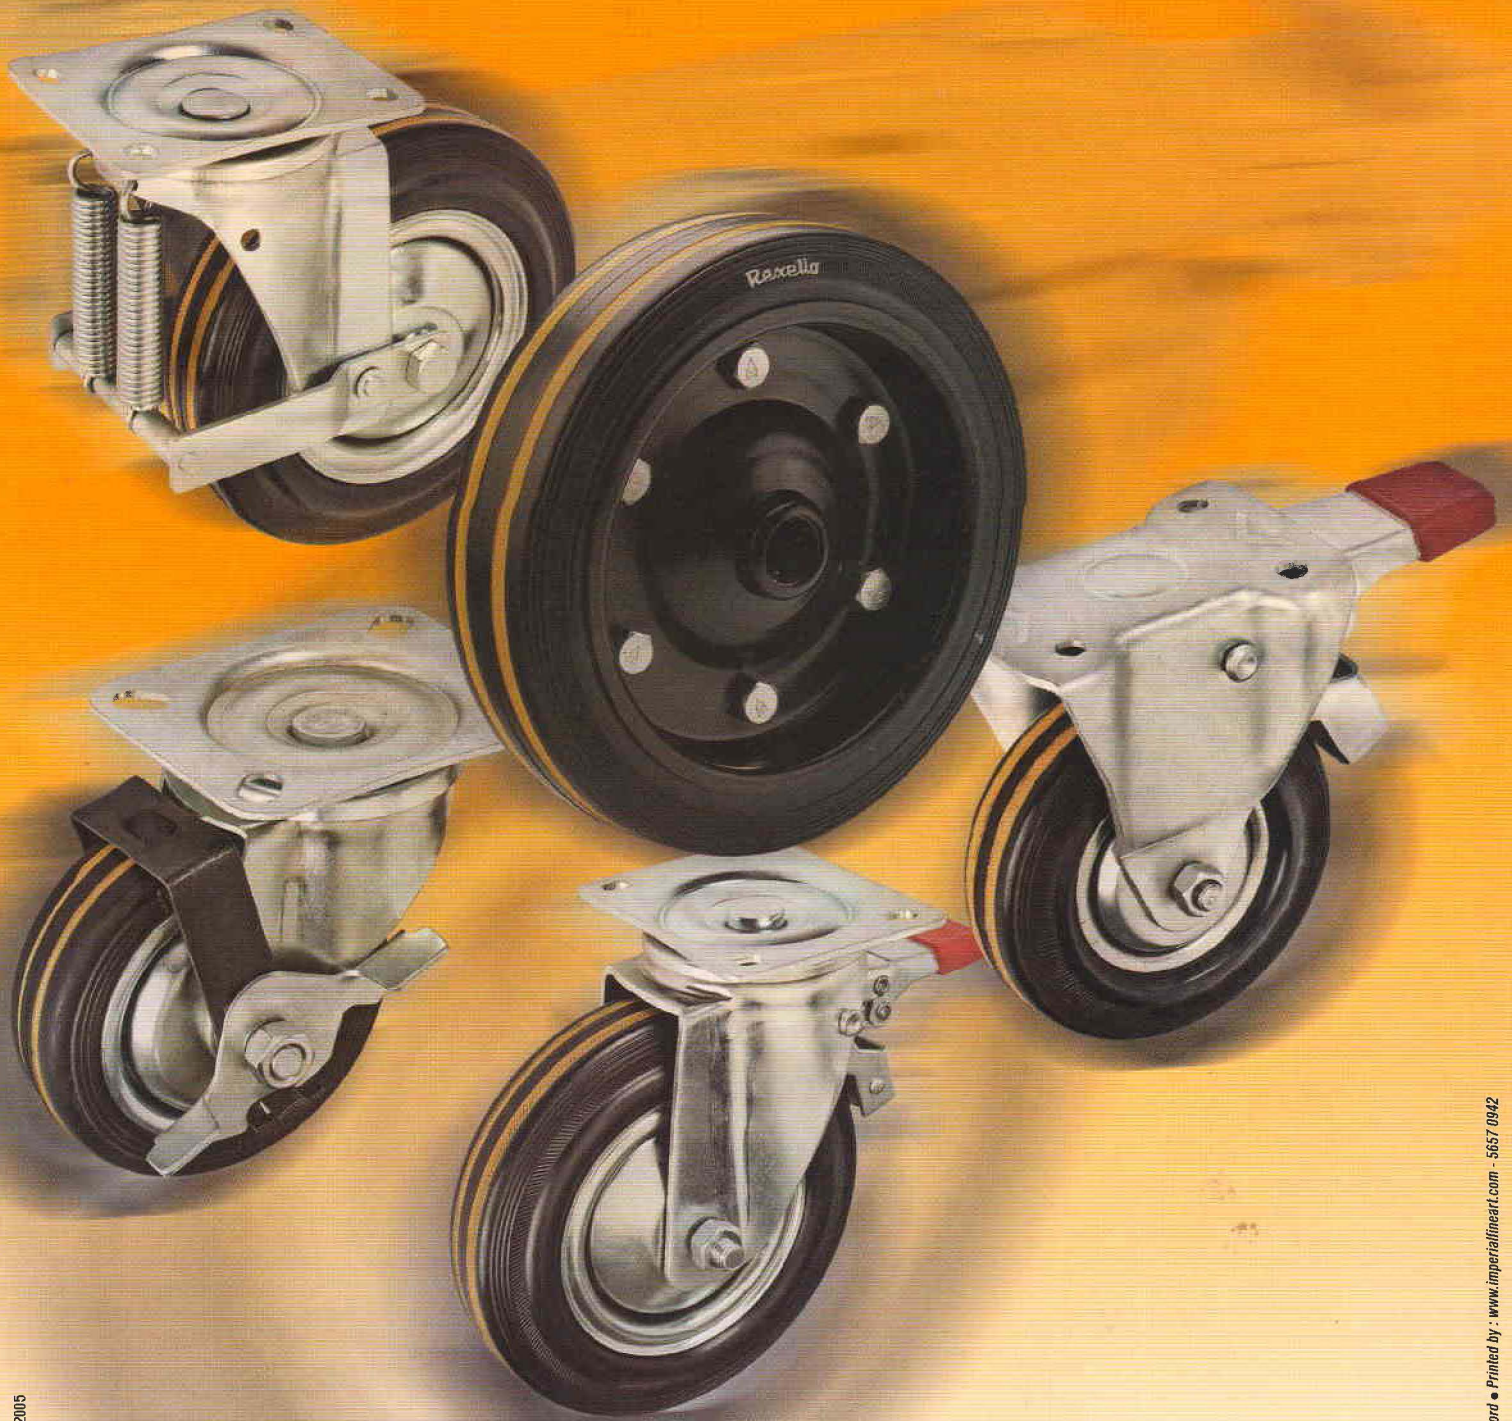

CODE NO C-007 11-06-2005

Note :  
Design &  
Specifications  
subject to change  
without notice



**Rexello**

MANUFACTURERS & EXPORTERS

**Rexello CASTORS PVT. LTD.**

23 D, Mahal Industrial Estate, Mahakali Caves Road, Andheri (E), Mumbai - 400 093.  
Tel : (91-22) 26873625 / 26874456 / 56921721. Fax : (91-22) 26873580 / 26874639.  
e mail : [rexello@vsnl.com](mailto:rexello@vsnl.com)

visit us at : [www.rexellocastors.com](http://www.rexellocastors.com) & <http://www.globalsources.com/rexello.com>

Designed by : last forward • Printed by : [www.imperialprint.com](http://www.imperialprint.com) - 5657 0942




# RG SERIES


## Custom Built Castors




Wheels with Heavy Duty pressed steel discs- bolted design with needle roller bearing & ball bearing. Wheels with nylon centres-grey tyres-special single ball bearing construction with fluff proof built in nylon guards.

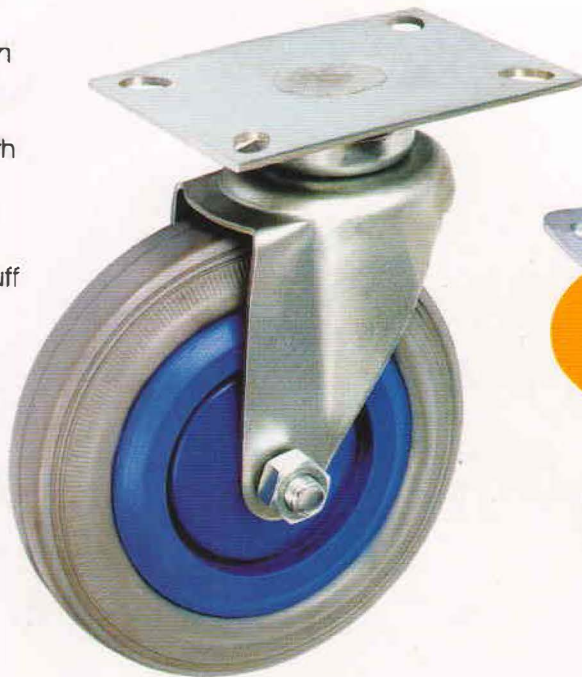

Precision ball bearing  
Swivel castor with plate fixture  
RGG/PT/CT/150/BP/TG

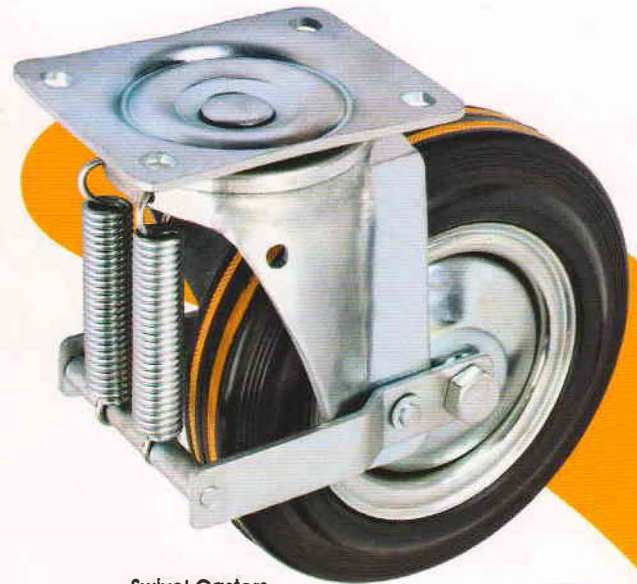


Swivel Castors  
with Spring Lock  
RG/PT/CT/200/R/TG/SA

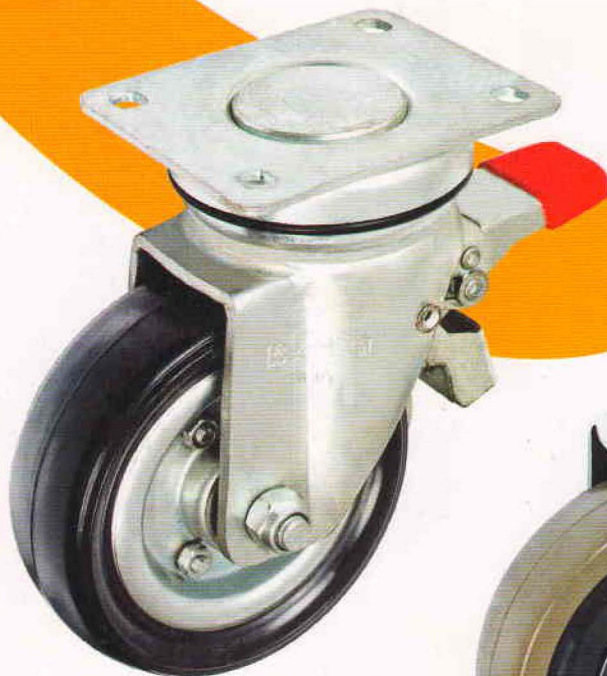

Heavy duty Castor with Taper  
Roller bearing secondary race  
RGM5/PT/CT/150/R/BK



Stainless Steel Swivel castor  
for Institutional use  
RG/SQSP/GCN/125/BP/TG

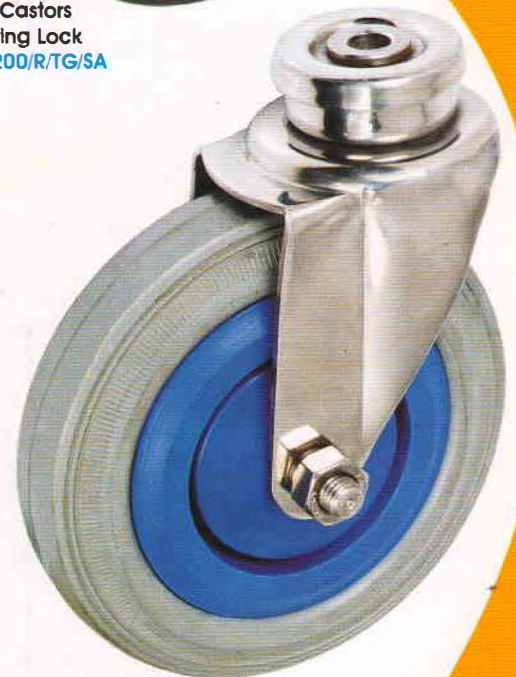

Precision ball bearing  
Swivel bolt hole 12.5mm  
RGG/BH/CT/200/BP/TG




# RG SERIES


## Pressed Steel Swivel Castors Solid Cushion Tyred





Contoured pressed steel swivel brackets and base plates with double ball race in swivel, protected by dust guard fitted with yellow lined solid cushion tyred wheels with Roller Bearings for all kinds of trolleys and mobile equipments.

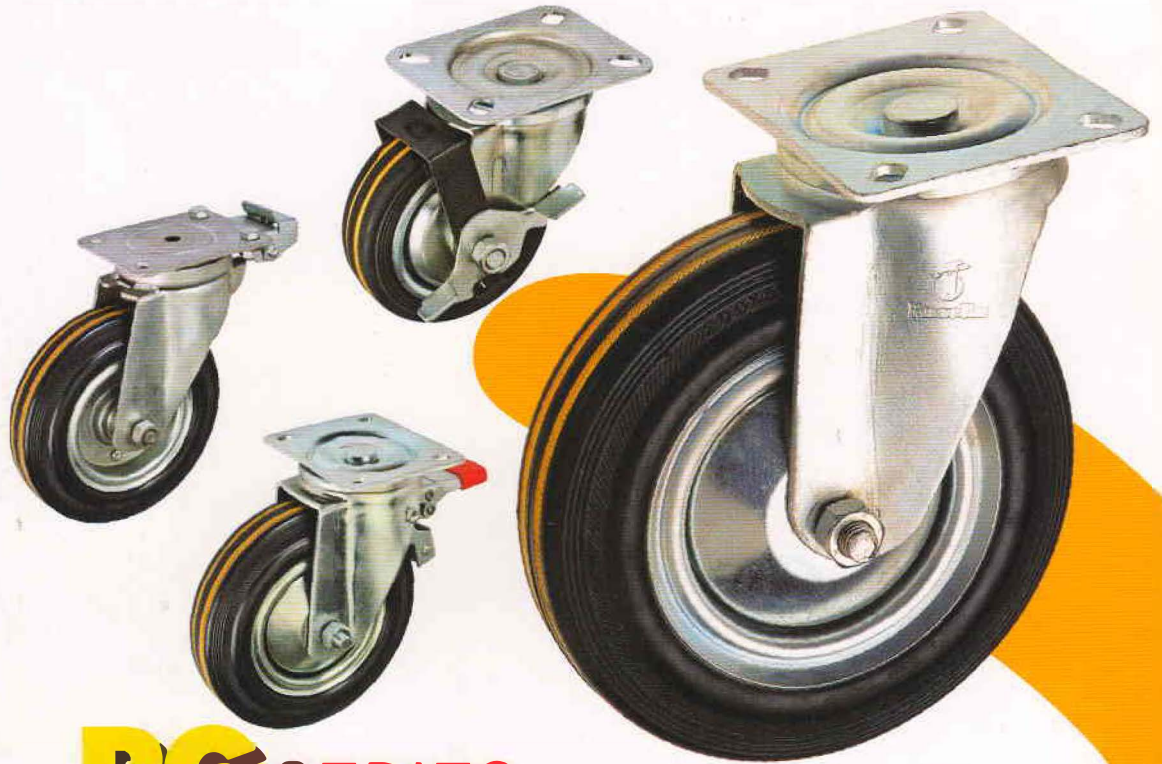

# RG SERIES

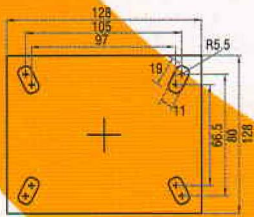

TOP PLATE-BOLT HOLE CENTERS AS PER I.S.I. & OUR STANDARD (COMBINED)



Wheel Size. A X B mm	Load Capacity. Kgs.	Overall Height. C mm	Top Plate Size D X E mm	Bolt Hole Center F X G mm	Bolt Hole Dia. H mm	Offset R mm	Each Unit Weight in Kgs. Approx.	Catalogue Reference
80 X 32	65	100	100 X 85	80 X 60 73 X 53	10 X 15	33	0.680	RG/PT/CT/80/R/TG
100 X 32	70	120	100 X 85	80 X 60 73 X 53	10 X 15	38	0.933	RG/PT/CT/100/R/TG
125 X 38	100	161	100 X 85	80 X 60 73 X 53	10 X 15	35	1.420	RG/PT/CT/125/R/TG
150 X 50	175	185	130 X 105	105 X 80 105 X 75	11.5	54	2.900	RG50/PT/CT/150/R
160 X 40	135	190	130 X 105	105 X 80 97 X 68	11 X 18.5	43	2.395	RG/PT/CT/160/R/TG
180 X 45	170	222	130 X 105	105 X 80 97 X 68	11 X 13.5	53	3.651	RG/PT/CT/180/R/TG
200 X 50	205	232	130 X 105	105 X 80 97 X 68	11 X 13.5	54	4.052	RG/PT/CT/200/R/TG
250 X 50	235	302	130 X 105	105 X 80 97 X 68	11 X 15	60	5.100	RG50/PT/CT/250/R
250 X 60	290	297	175 X 162	150 X 135	15	87	7.075	RG60/PT/CT/250/R
280 X 50	285	317	130 X 105	105 X 80 97 X 68	11 X 15	92	5.500	RG50/PT/CT/280/R
280 X 63	350	317	175 X 162	150 X 135	15	94	7.850	RG63/PT/CT/280/R
300 X 50	285	347	130 X 105	105 X 80 97 X 68	11 X 15	65	6.250	RG50/PT/CT/300/R

Thread guards : Size 100-200 at no extra charge / Size 250-280 at an extra charge. Locking device : At extra charge, add "BK" to catalogue ref.  
Type of Bearing in wheel : Needle roller bearing standard. Ball Bearings available at extra charge, add "B" to catalogue ref. instead of R. Standard finish : Bright zinc galvanized.



# RG SERIES


## Pressed Steel Fixed Castors Solid Cushion Tyred

ISO 9001-2000  
Quality System  
Quality Endorsed Company  
Certification No: QEC13252



Fixed brackets of pressed steel with yellow lined solid cushion tyred wheels.



# RG SERIES

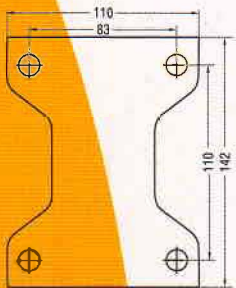

ALTERNATE DIMENSIONS OF 160 FIXED BRACKETS



Wheel Size. A X B mm	Load Capacity. Kgs.	Overall Height. C mm	Top Plate Size D X E mm	Bolt Hole Center F X G mm	Bolt Hole Dia. H mm	Each Unit Weight in Kgs. Approx.	Catalogue Reference
80 X 32	65	100	100 X 85	76 X 56	7	0.570	RG/F/CT/80/R/TG
100 X 32	70	120	100 X 85	76 X 56	10	0.785	RG/F/CT/100/R/TG
125 X 38	100	161	100 X 85	76 X 56	10	1.310	RG/F/CT/125/R/TG
150 X 50	175	185	130 X 105	105 X 77	10	2.300	RG50/F/CT/150/R
160 X 40	135	190	130 X 105	101 X 74	10	2.445	RG/F/CT/160/R/TG
180 X 45	170	222	130 X 105	101 X 74	10	3.138	RG/F/CT/180/R/TG
200 X 50	205	232	130 X 105	101 X 74	10	3.356	RG/F/CT/200/R/TG
250 X 50	235	302	130 X 105	101 X 74	13	4.460	RG50/F/CT/250/R
250 X 60	290	297	180 X 145	150 X 105	13	6.056	RG60/F/CT/250/R
280 X 50	285	317	130 X 105	101 X 74	13	4.860	RG50/F/CT/280/R
280 X 63	350	317	180 X 145	150 X 105	13	6.977	RG63/F/CT/280/R
300 X 50	285	347	130 X 105	101 X 74	13	5.460	RG50/F/CT/300/R

Thread guards : Size 100-200 at no extra charge / Size 250-280 at an extra charge. Type of Bearing in wheel : Needle roller bearing standard. Ball Bearings available at extra charge, add "B" to catalogue ref. instead of R. Standard finish : Bright zinc galvanized.



# RG SERIES

## Solid Cushion Tyred Wheels



Pressed steel discs of bolted design with needle Roller Bearings.

All sizes - Bright Zinc galvanized, For all kinds of Trolleys, Vehicles, Swivel and Rigid Castors etc.



# RG SERIES

Wheel Size. A X B mm	Load Capacity. Kgs.	Wheel Bore D mm	Hub Length L mm	Unit Weight Kgs. Approx.	Catalogue Reference
100 X 29	70	15	37.5	0.392	WHL/RGCT/100/30/R
125 X 37	100	15	38.5	0.668	WHL/RGCT/125/37/R
160 X 40	135	19	50.5	1.404	WHL/RGCT/160/40/R
180 X 45	170	19	56.5	1.575	WHL/RGCT/180/45/R
200 X 50	205	19	56.5	2.202	WHL/RGCT/200/50/R
250 X 60	290	25.4	79.5	3.817	RG/CT102-RB
254 X 76	310	25.4	83.0	5.900	WHL/RGCT/254/76/R
280 X 50	250	25.4	82.5	3.800	WHL/RGCT/280/50/R
280 X 63	350	25.4	82.5	4.560	WHL/RGCT/280/63/R
325 X 100	500	25.4	113.0	9.400	WHL/RGCT/325/100/R
400 X 63	300	25.4	70.0	7.500	WHL/RGCT/400/63/R
400 X 100	500	25.4	113.0	11.700	WHL/RGCT/400/100/R

BALL BEARINGS AVAILABLE AT EXTRA CHARGE / STANDARD FINISH - BRIGHT ZINC GALVANIZED / TYRES - YELLOW LINED SOLID CUSHION TYRES

